

REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		



SPECIFICATION

- 1.Rating : DC 25V 3.0A;
- 2.Contact resistance: $\leq 50\text{m}\Omega$;
- 3.Insulation resistance: $\geq 100\text{M}\Omega$ (DC250V);
- 4.Withstand voltage: 500VAC ;
- 5.Insertion and extraction force: 3-30N;
- 6.life test: 5,000 cycles.

EAST-DC-044-X. XX-X

中心针:
2. 00: $\varnothing 2.0\text{mm}$
2. 50: $\varnothing 2.5\text{mm}$

塑胶材质:
P:PBT
L:LCP

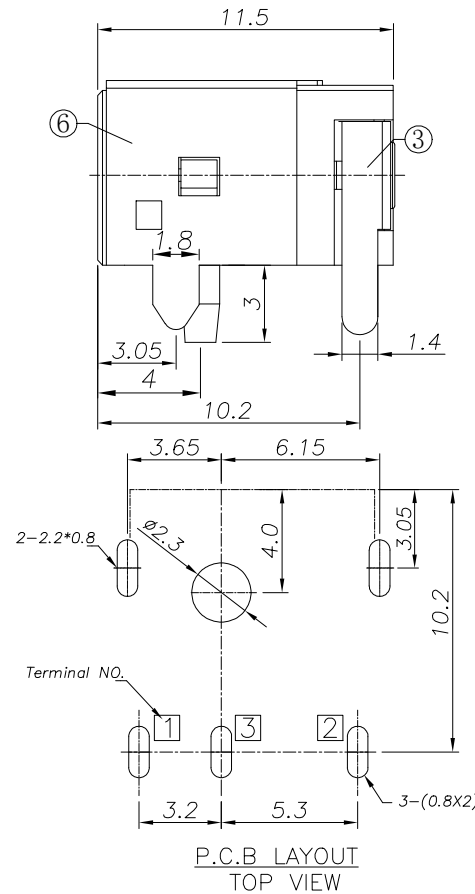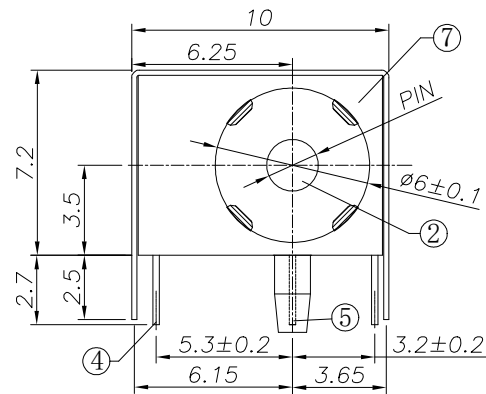

Model NO.	DC-044AL
Schematic	

7	外壳	1			
6	盖脚	1			
5	插针	1			
4	平片	1			
3	弯片	1			
2	弹片	1			
1	基座	1			
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK
TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X. X ± 0.38 X. XX ± 0.25 X. XXX ± 0.10 Angle $\pm 1^\circ$		COSTOMER COPY		深圳市东方御业科技有限公司 www.dfyyconn.com Tel:075527155560	
DRAWN:		CHENLEI	2017/09/10	TITIAL: DC JACK044款包外壳	
CHECKED:		CHENLEI	2017/09/10	PART NO: EAST-DC-044-X. XX-X	
APPROVED:		QINKAIXING	2017/09/10	UNIT: mm	
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.				SCALE: N/A	SHEEL: 1:1
				REV.	