

EAST-59B-38880111101

CONTACTS (金針根數) : 7

1-1. 2. 3. 6 PIN; 8-8CONTACTS (8C)
PLASTIC (塑料) :

1-PBT; 2-NYLON66 (尼龍66) ;

3-NYLON46 (尼龍46)





COLOR (顏色) :

1-BLACK (黑色)

GOLD PLATING (鍍金厚度) :

1-FU": 2-1. 5U": 3-3U": 4-6U":

5-15U": 6-30U": 7-50U"

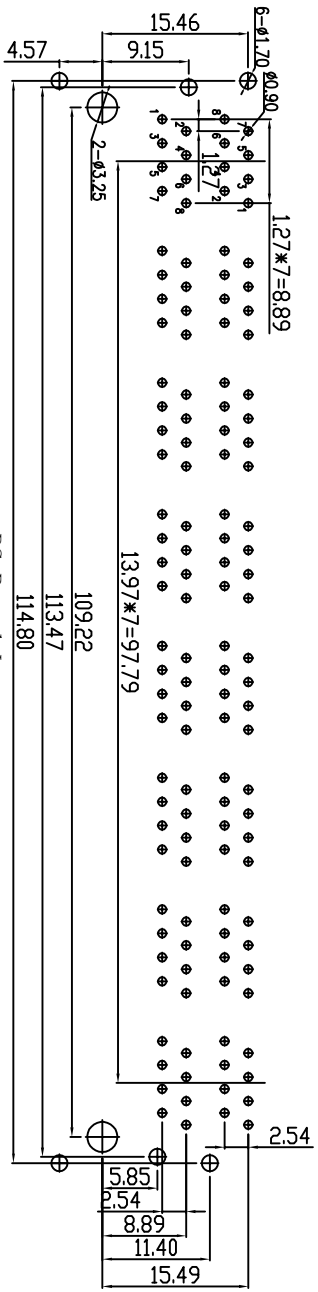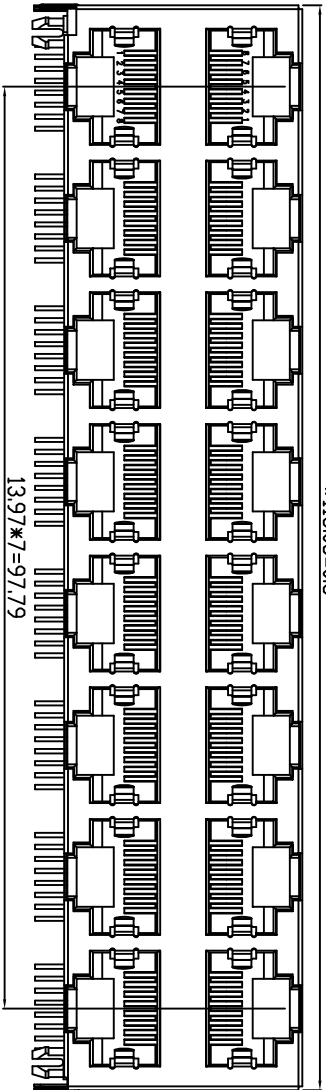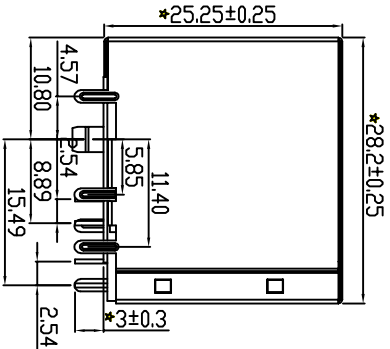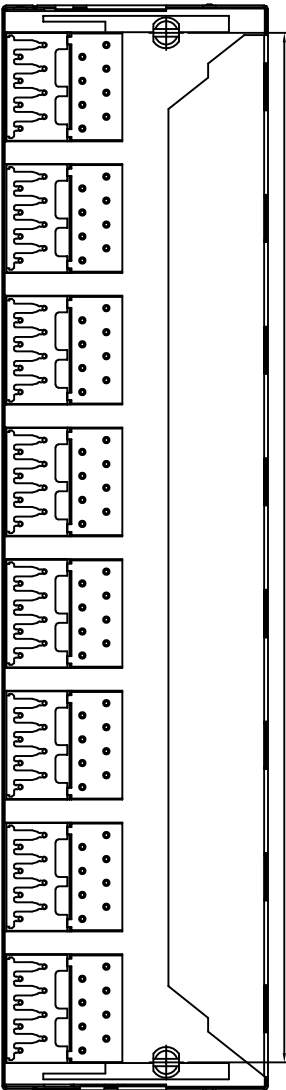

- NOTES:
- ELECTRICAL:
- VOLTAGE RATING: 125V AC.
 - CURRENT RATING: 1.5A.
 - CONTACT RESISTANCE: 30 mΩ MAX.
 - INSULATION RESISTANCE: 500 MΩ MIN @ 500V DC.
 - DIELECTRIC STRENGTH: 1000V AC 50Hz or 60Hz, 1MIN.
- MECHANICAL:
- INSERT MATERIAL: U994V-0.
 - CONTACT MATERIAL: DIAMETER 0.46mm C51000(QSn4-0.3) PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
 - SHIELD: 0.20mm THICKNESS H65V BRASS NICKEL PLATED.
 - MATING/UNMATING FORCE: 2.2KG. F MAX.
 - RETENTION STRENGTH: 3.0KG. F MIN BETWEEN JACK AND PLUG.
 - OPERATING LIFE: 750 CYCLES MIN.
- ENVIRONMENTAL:
- STORAGE: -40°C ~ +85°C RELATIVE HUMIDITY<70%.
 - OPERATION: -40°C ~ +85°C.
- Remark:

1. The mark with★ is the key inspection dimension for QC.

PC Board Layout

TOLERANCES UNLESS OTHERWISE SPECIFIED:		CUSTOMER COPY		DRAWING: 2017/09/10		CHECKED: 2017/09/10		APPROVED: 2017/09/10		PART NO: EAST-59B-38880111101	
X	± 0.38			DRAWN: 2017/09/10		CHECKED: 2017/09/10		APPROVED: 2017/09/10		R/J45 56S 2X8 8P8C 无后背脚	
X.X	± 0.25									SCALE: N/A	
X.XX	± 0.10									SHEET: 1:1	
X.XXX	± 1°									REV: (REHS)	
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue Electronic Co., Ltd. SHALL NOT BE REPRODUCED.											
TOLERANCES UNLESS OTHERWISE SPECIFIED:				CUSTOMER COPY				DRAWING: 2017/09/10			
X								DRAWN: 2017/09/10			
X.X								CHECKED: 2017/09/10			
X.XX								APPROVED: 2017/09/10			
X.XXX											
Angle ±1°											
深圳市东方御业科技有限公司 WWW.DFYCCNN.COM TEL:0755-27155560											